

Date Modified 7/09/09

# Three Full Door Freezer

## JFD-72F

72 cu. ft., 3 Sections



## Standard Features

- Fully Recessed Door Handles
- Reinforced Door Hinges
- Slide Shelving System
- CFC-free R-404a Refrigerant
- Self-Contained Bottom Mounted Refrigeration System
- 2.5" Thick Foamed-in-place Polyurethane Insulation
- 9 Vinyl-Coated Wire Shelves
- Evaporative Hot Gas Condensate Pan
- Fully Covered Interior Corners
- Exterior Digital Temperature Control
- 5" Casters Installed
- Snap-in Magnetic Door Gaskets
- Standard Door Locks
- Automatic Door Closure with 90° Hold Open Feature
- Assembled in the USA

## Materials

- INTERIOR: Stainless steel interior walls, floor and ceiling  
Vinyl-coated wire shelves
- EXTERIOR: Stainless steel sides and doors



NSF/ANSI Standard 7



C US

### GENERAL INFORMATION

Dimensions: 81" (W) x 32.25" (D) x 81.75" (H)

Doors: 3

Unit Weight: 710

# Shelves: 9

Ship Weight: 750 lbs

Cubic Ft.: 72

Shelf Size: 25.0" x 20.75"

Cord Length: 82 in.

### TECHNICAL DATA

Refrigerant: R-404A

Horsepower: 3/4, 1/2

Start Amps: 13.2

Volts: 220

Run Amps: 6.2

#Compressors: 2



For the most current specifications, visit our Website @ [www.ASCENDmfg.com](http://www.ASCENDmfg.com)  
1575 Zephyr Ave, Hayward, CA 94544 (800) 314-4477 (510) 477-3400 Fax: (510) 477-3412

©Copyright 2008. ASCEND is a registered trademark of Jimex Corporation.



## JFD-72F




Three Solid Full Door Freezer

### ELECTRICAL PLUG



NEMA 6-15P plug  
6-15R receptacle  
required

### DIMENSIONAL INFORMATION

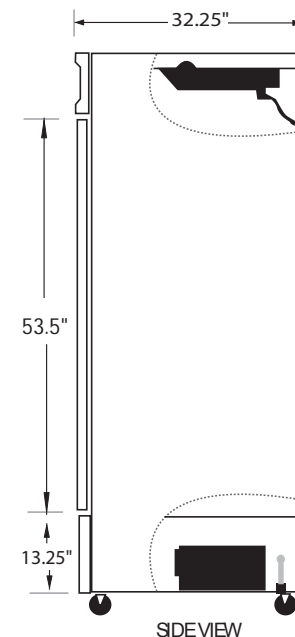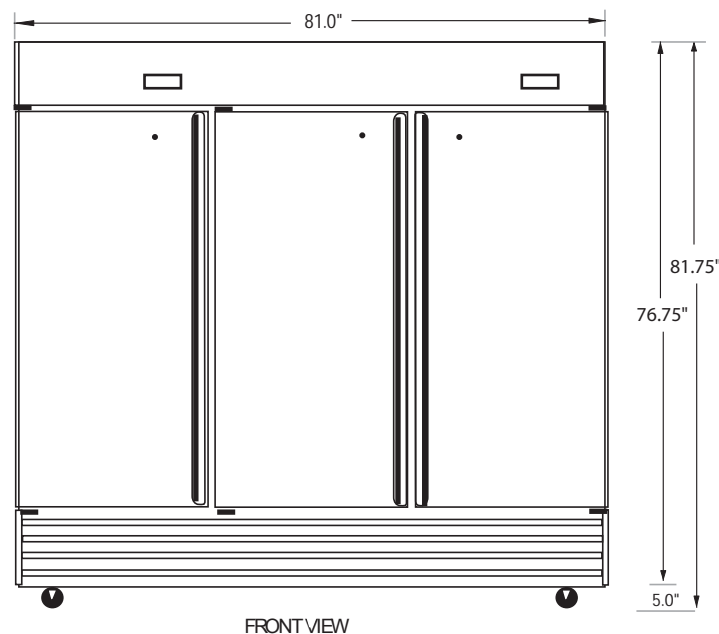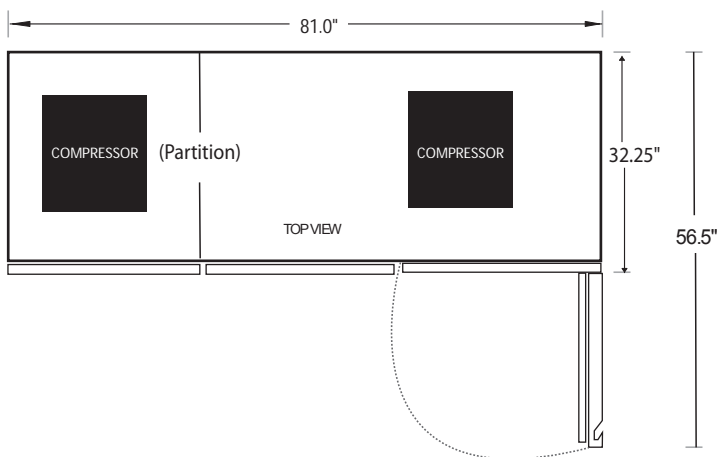

### FEATURES & BENEFITS

- **Stainless steel interior and exterior for greater durability, construction and appearance**
- Holds -10° F to 10° F as refrigerator
- **Unit partitioned into two separate sections where each can be set to different temperatures**
- Self-contained bottom mounted refrigeration system and high humidity coated fin coil evaporator
- Micro-controller with adjustable temperature variance, automatic defrost intervals, setpoint limits, and parameter locking functions
- **Exterior LED temperature display with digital controls. Temperature setting is easy, fast and accurate**
- 2.5" thick, foamed-in-place polyurethane high density insulation
- **5" casters standard. Easy mobility and installation**
- Heavy-duty overall construction for high- volume constant duty operation
- 9 adjustable vinyl-coated steel wire shelves. Built-in tray slides to accomadate shelves (standard) or 18"x26" sheet pans (optional)
- **Hot gas condensate- no floor drain required!**

### MATERIALS

- **INTERIOR:** Stainless steel interior walls, floor, and ceiling  
Vinyl-coated wire shelves
- **EXTERIOR:** Stainless steel sides and doors