



Reaching New Heights

Date Modified 11/6/08

Three Glass Swing Door Merchandiser



JGD-72R
72 cu.ft., 3 swing doors

JGD-72R-WHT
White exterior

*Double pane tempered thermal glass!
"Double wide" condenser!
Aluminum door frames!
Available in black or white exterior.*

STANDARD FEATURES:

- Capillary tube
- CFC-free R-134a Refrigerant
- Fully Covered Interior Corners
- 8' Cord & Plug
- Bottom-Mounted Compressor
- Foamed-in-place Polyurethane Insulation
- Thermostatic Temperature Control
- Assembled in the USA
- Evaporative Condensate Pan
- Vinyl-Coated Wire Shelves
- Automatic Door Closure with 90° Hold Open Feature

MATERIALS:

INTERIOR: Cold-colored steel ceiling and walls.
Stainless steel floor.
Vinyl-coated wire shelves.

EXTERIOR: Cold-colored steel cabinet.
Plastic top sign panel.
Double-pane glass doors.



NSF/ANSI Standard 7



ISO 17025:2005 Certified


DIMENSIONAL DATA:

Model No.	L	D	H	Doors	Cu.Ft.	Shelves	H/P	Volt	Amp.	NEMA	Ship Wt.
JGD-72R	81.0"	32.0"	78.0"	3	72	12	1/2	115/60/1	9.4	5-20P	750



Glass Door Merchandiser
JGD-72R

Description: Three glass swing door merchandiser, 72 cu. ft

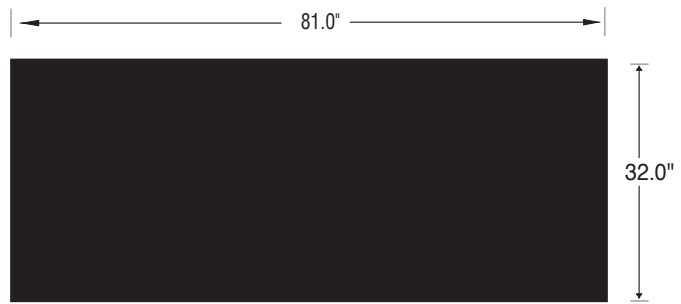

TOP VIEW

Features & Benefits

Self Contained bottom mounted compressor for "no-stoop" easy removal of merchandise.

2.5" thick foamed-in-place high density polyurethane insulation.

Double-pane tempered thermal glass for better insulation and energy efficiency.

Automatic door closure with 90° hold open feature for easy loading and unloading.

Aluminum door frames.

"Double wide" oversized condenser coil.


Illuminated sign panel with manual on/off switch.

Completely sealed, low-noise compressor.

- Holds 33° F to 41° F

Reinforced door hinges.

Twelve vinyl-coated adjustable steel wire shelves.

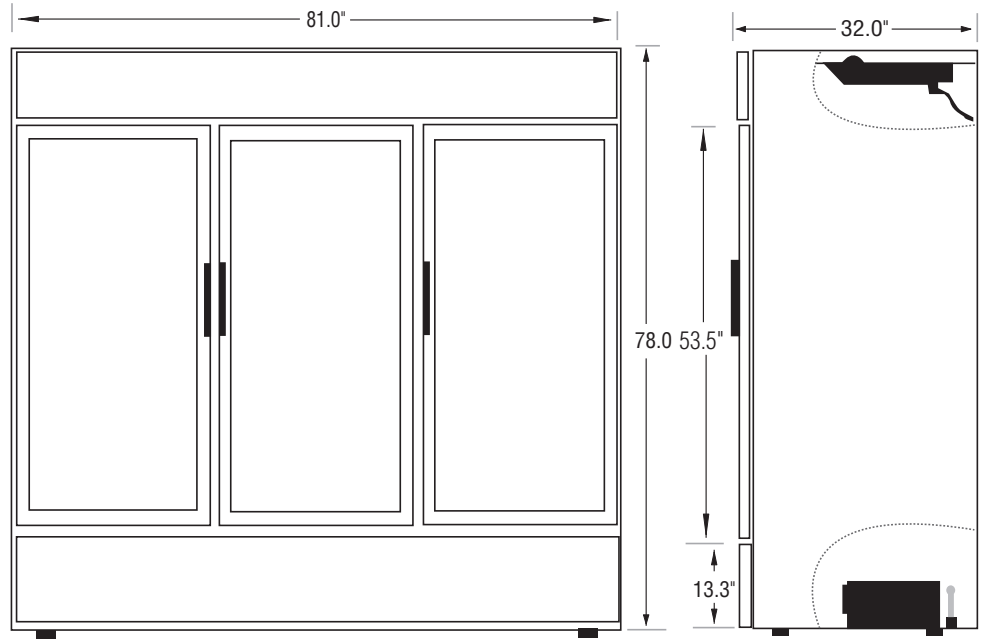

FRONT VIEW

SIDE VIEW



NEMA 5-20P plug
 5-20R receptacle required

General Information

Cubic Ft.: 72

Doors: 3

Exterior: Colored Steel

Interior: Colored Steel

Shelf Size: 24.5" x 23.0" & 24.5" x 24.5"

Unit Weight: 710 lbs.

Ship Weight: 750 lbs.

Technical Data

Refrigerant: R-134a

Start Amps: 13.0

Run Amps: 9.4

Horsepower: 1/2

Volts: 115

#Compressors: 1

Cord Length: 82 in.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE